


#13 High Pressure Paint Spray Hose

Tried. Tested. And Wanted.

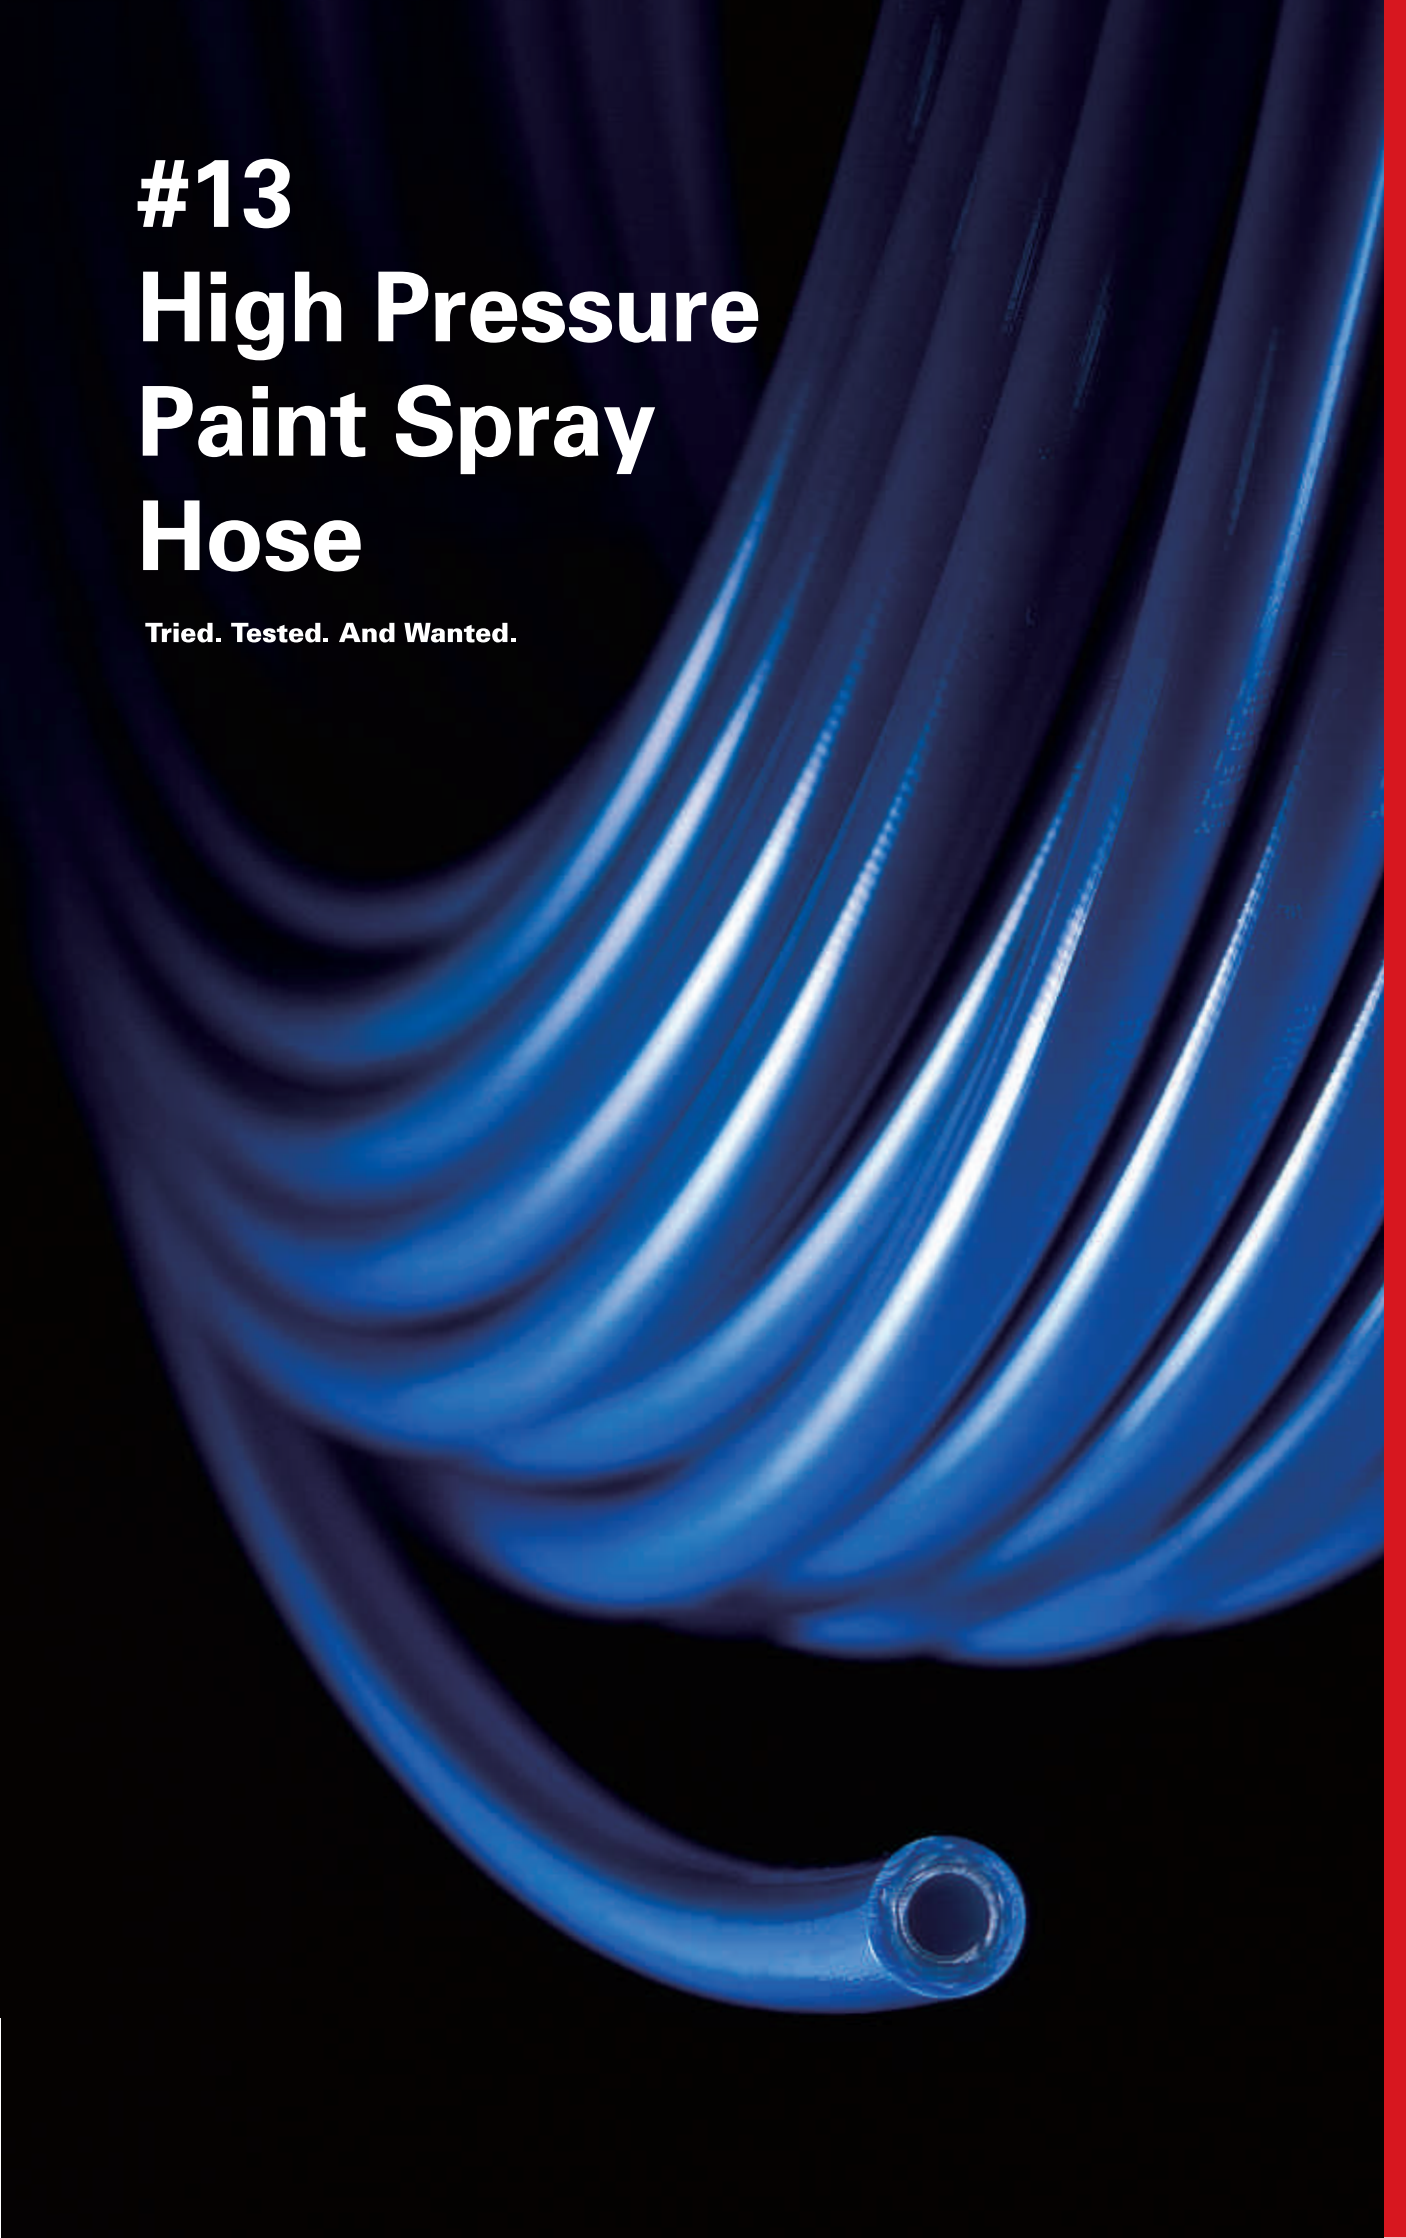

PRODUCT DESCRIPTION

APPLICATIONS

- Static conductive airless paint spray hose.
- High volumetric expansion rate and long impulse life.
- Tube resists paints, lacquers and thinners.
- Has a rating of only one ohm/ft. for electrical resistance

TEMPERATURE

-40°F to 180°F

INNER TUBE

Polyamide

REINFORCEMENT

One braid of Synthetic fiber + one electrically conductive Polyethylene compound.

COVER

Black or Red Polyurethane

ORDER & PACKAGING

PLACING AN ORDER OR REQUEST


Specifying Standard Items:

Please specify the following:

1. Series(Item) Number
2. OD. Size
3. ID. Size
4. Tube length (Please specify Metric/Imperial)
5. Color

Example of a request

10M of 13 x 6.4 Red Paint Spray Hose

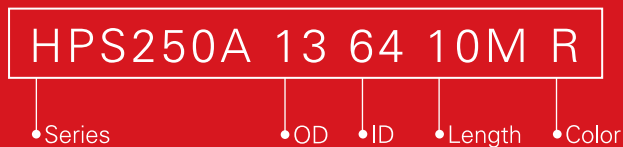

HIGH PRESSURE PAINT SPRAY HOSE

Series

HPS

Standard color

BU, Blue / BK, Black / R, Red

Temperature Range

-40°C ~ 80°C

-40°F ~ 176°F

SIZE

ITEM NO.	HOSE SIZE		MAX. WORKING PRESSURE AT 23°C (kg/cm ²) or AT 75°F (psi)	MIN. BURST PRESSURE AT 23°C (kg/cm ²) or AT 75°F (psi)	LENGTH
	OD	ID			
HPS250A01	13mm	6.4mm	250 bar	1000 bar	7. 10. 15 (m)
HPS250A01	.51"	1/4"	3300 psi	14400 psi	23. 30. 50 (ft)

**Other sizes, colors, printing, length and package option may be available.*

PACKAGING

TYPE



Film Wrapped

50M or less than 100M



