


#15 High Pressure Grease Gun Connecting Hose

Tried. Tested. And Wanted.

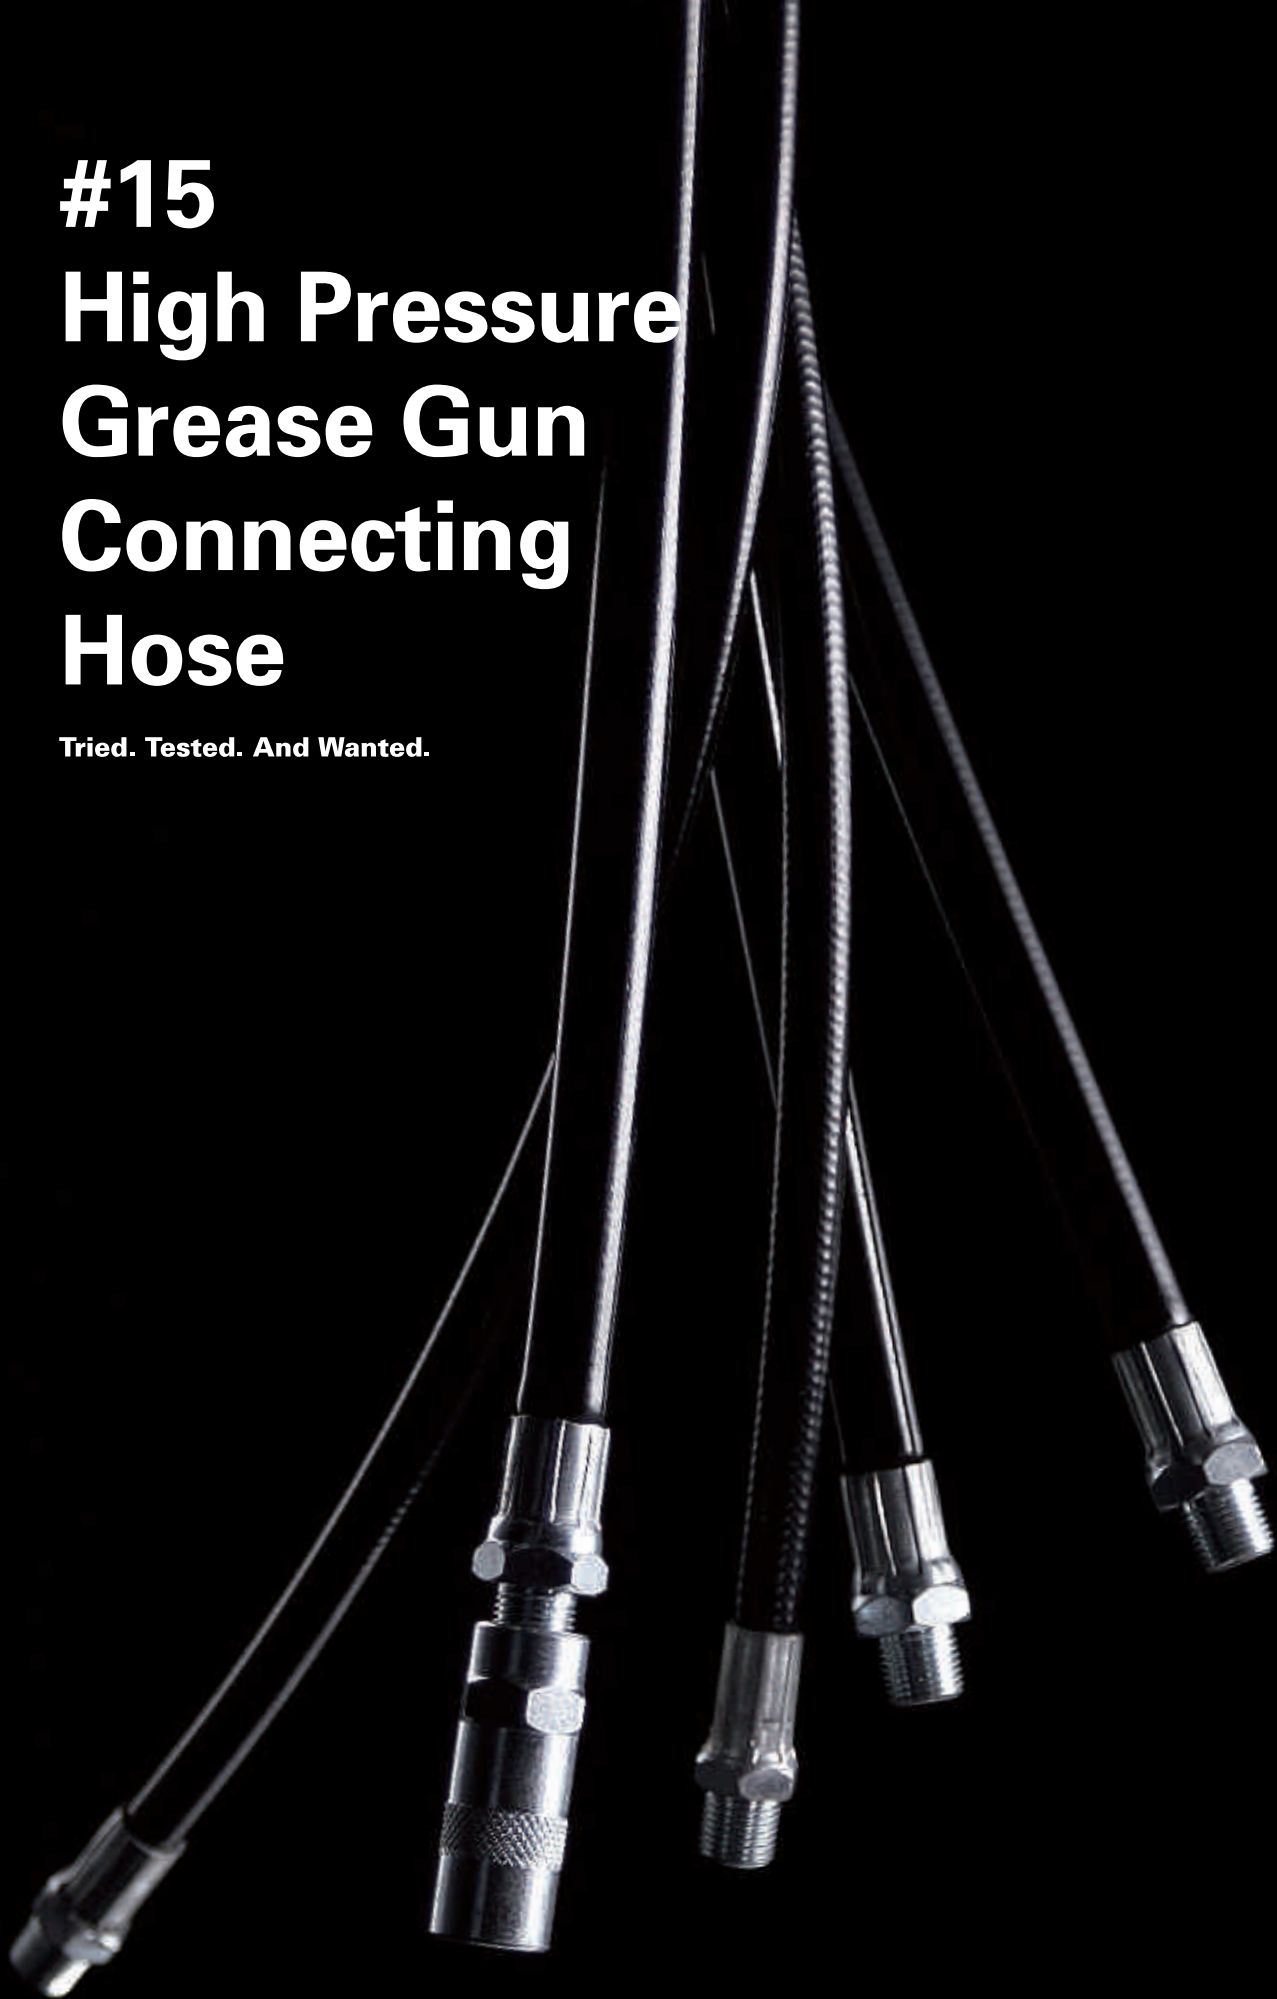

PRODUCT DESCRIPTION

APPLICATIONS

Soft grease hose with fitting connector on both ends.
Threads (1/8" bsp, Midx1, 1/8"npt)
Working pressure from 3500psi to 7500psi.

TEMPERATURE

-40°C to 90°C

INNER TUBE

Polyamide or Polyester Elastomer (Dupon)

REINFORCEMENT

One braid of Polyester fiber
Two braids of Polyester fiber (HPG510A01 ONLY)

COVER

Black Polyurethane

ORDER & PACKAGING

PLACING AN ORDER OR REQUEST


Specifying Standard Items:

Please specify the following:

1. Series(Item) Number
2. OD. Size
3. ID. Size
4. Tube length (Please specify Metric/Imperial)
5. Color

Example of a request

15CM of 8.2 x 3.5 Black High Pressure Grease Gun Connecting Hose

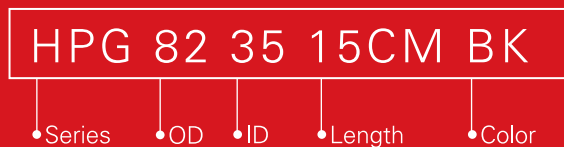

HIGH PRESSURE GREASE GUN CONNECTING HOSE

Series

HPG

Standard color

BK. Black

Temperature Range

-40°C ~ 90°C

-40°F ~ 194°F

METRIC SIZE

LTEM NO.	HOSE SIZE		MAX. WORKING PRESSURE AT 23°C (kg/cm ²)	MIN. BURST PRESSURE AT 23°C (kg/cm ²)	LENGTH 15. 20. 25. 30. 45 (cm)
	OD (mm)	ID (mm)			
HPG240A01	8.2	3.5	3500	14000	6". 8". 10". 12". 18"
HPG310A01	8.4	3.5	4500	18000	6". 8". 10". 12". 18"
HPG240A02	10.8	4.8	3500	14000	6". 8". 10". 12". 18"
HPG310A02	11.5	4.8	4500	18000	6". 8". 10". 12". 18"

** Other sizes, colors, printing, length and package option may be available*

PACKAGING

TYPE



Blister Card



