

# #7 PVC Braid Hose

Tried. Tested. And Wanted.



*SHPI braided PVC hoses are manufactured through advanced hose production techniques using extrusion of high quality PVC material, comprised of polyester fiber mesh compressed between two layers of polymer.*

*With a wide variety of applications including, pneumatic tools and various liquids' delivery, the use of high quality PVC offers strong resistance against a wide range of chemicals and allows the hose to be used over a wide temperature range.*

## ORDER & PACKAGING

### PLACING AN ORDER OR REQUEST

---


Specifying Standard Items:

Please specify the following:

1. Series(Item) Number
2. OD. Size
3. ID. Size
4. Tube length (Please specify Metric/Imperial)
5. Color

#### **Example of a request**

50FT of 3/8 x .594 Blue PVC Braid

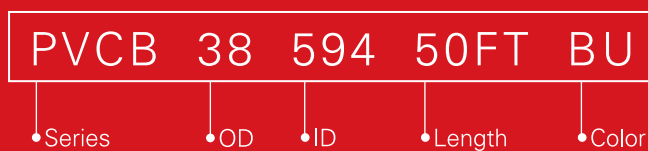

## PVC BRAID HOSE

### Series

PVCB

### Working Pressure

3 to 1 safety factor

### Temperature Range

0°C ~ 65°C

32°F ~ 150°F

### Standard color

BU. Blue / BK. Black / C. Clear /

OR. Orange / R. Red / Y. Yellow

### METRIC SIZE

PART NUMBER	HOSE ID (mm)	HOSE OD (mm)	WORKING PRESSURE AT 23°C (kg/cm <sup>2</sup> )	BURST PRESSURE AT 23°C (kg/cm <sup>2</sup> )	LENGTH (m)	OPTIONAL FITTING
PVCB63115	6.3	11.5	15	45	10, 20, 30, 50, 100	1/4"/PT
PVCB8135	8.0	13.5	15	45	10, 20, 30, 50, 100	1/4", 3/8"PT
PVCB1016	10.0	16.0	15	45	10, 20, 30, 50, 100	1/4", 3/8"PT
PVCB125185	12.5	18.5	13	39	10, 20, 30, 50, 100	1/4", 3/8"PT

### INCH SIZE

PART NUMBER	HOSE ID (inch)	HOSE OD (inch)	WORKING PRESSURE AT 75°F (psi)	BURST PRESSURE AT 75°F (psi)	LENGTH (ft)	OPTIONAL FITTING
PVCB14438	1/4	.438	300	900	25, 50, 100, 300	1/4"NPT
PVCB516531	5/16	.531	250	750	25, 50, 100, 300	1/4", 3/8"NPT
PVCB38594	3/8	.594	250	750	25, 50, 100, 300	1/4", 3/8"NPT
PVCB12750	1/2	.750	200	600	25, 50, 100, 300	1/4", 3/8" 1/2"NPT

*\*Other sizes, colors, printing, length and package option may be available.*

### PACKAGING

#### TYPE

#### FEATURE



#### **Film Wrapped**

10M or less than 100M  
0 splices allowed

A package for special lengths and large-scaled O.D that can be recycled.

*\* Other sizes, colors, printing, length and package option may be available*

SHPI strives to provide continuous lengths of tubing. However, manufacturing practices and stringent quality control processes will dictate the need for occasional splices.

Reels of tubing can be specially ordered without splices.

(Prior notice must be given when placing order)



